




**Adjustable Wood/Steel  
Roof Bracket**

Model # 2510

Heavy duty wood and galvanized steel construction. Designed to hold a 12" platform. Adjustable to two positions, and can be easily installed and removed without damaging shingles. This durable bracket includes a platform retainer and a unique locking mechanism for additional safety. The capacity is one worker plus 40 lbs. per 8 foot staging, with a maximum span of 8 feet between brackets.

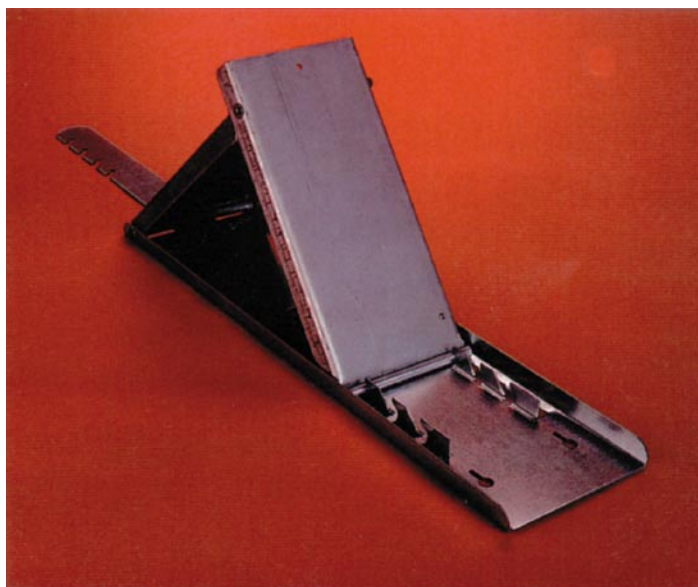

**Slater's Style  
Roof Bracket**

Model # 2525

Fits any roof pitch with locking adjustments in six different positions. Constructed of heavy duty galvanized steel, this bracket provides strength, safety, and durability. It's easy to set-up and operate, and can be repositioned and taken down without damaging shingles or slate. Folds flat for convenient storage and transport.

For use on **VARIABLE PITCH ROOFS AND PROJECTS**

Wood/Steel - Model #2510 12" x [ 30°, 45°, or 60° ]

Slater's Style - Model #2525 10" x [ 30°, 45°, 60°, or 90° ]




© Copyright 2003 • Qual-Craft® Industries • 1551 Central Street  
PO Box 559 • Stoughton, MA 02072



Customer Support and Ordering Information

**781-344-1000 • www.qualcraft.com**



**INSTRUCTIONS FOR INSTALLATION AND USE OF THE MODEL #2525 SLATERS STYLE ROOFING BRACKET:**  
**CAPACITY:** One worker per eight (8) feet of scaffolding plus 40 pounds of materials. **GENERAL REQUIREMENTS:** When installed, the platform support arm must be set to match the pitch of the roof, allowing for the installation of a fully decked and level walk surface. Secure by sliding lock completely between platform arm and base. **MOUNTING THE ROOF BRACKET:** 1) All brackets shall be attached to the roof with 20-penny nails. Insert mounting-plate and secure to roof using all slots. 2) Position bracket so that all nails penetrate both the roof's surface and the rafter below. 3) Spacing between brackets shall not exceed 8 feet. 4) Use teardrop holes in bracket only when bracket is used for supporting roofing materials. **INSTALLING PLATFORM:** 1) Wood platforms shall not be less than 2 inches nominal thickness and shall extend beyond the platform arm not less than 6 inches and not more than 12 inches. 2) Always use clear, straight-grained wood free from knots or defects. 3) If extended length platforms are required, use additional roofing brackets every 8 feet. 4) Secure to bracket by nailing the platform to the bracket using the hole provided in the platform retainer. **INSTRUCTIONS FOR USE:** 1) No more than one person shall occupy any given 8 feet of a roofing bracket scaffold. 2) Always use an OSHA compliant fall arrest system, guardrail, catch platform or other safety equipment as required by Local, State or Federal OSHA Regulations. 3) Roof Brackets are intended for use by the experienced tradesman. 4) OSHA Regulations require that employers provide training in the use and care of this product. **CARE AND MAINTENANCE:** 1) Inspect all Roofing Brackets before each use to be sure that there is no damage or deformation, or deterioration from rusting. Discard if necessary. 2) Do not throw or drop from a building or onto a truck. 3) Do not use if exposed to extreme heat or cold. Discard at once. 4) Do not use if wet or frozen.



**INSTRUCTIONS FOR INSTALLATION AND USE OF THE MODEL #2510 WOOD/STEEL ROOFING BRACKET:**  
**CAPACITY:** One worker per eight (8) feet of scaffolding plus 40 pounds of materials. **GENERAL REQUIREMENTS:** When installed, the platform support arm must be set to match the pitch of the roof, allowing for the installation of a fully decked and level walk surface. Secure by sliding lock completely between platform arm and base. **MOUNTING THE ROOF BRACKET:** 1) All brackets shall be attached to the roof with 20-penny nails. Use all teardrop holes on left or all slots on right side of mounting plate as desired. 2) Position bracket so that all nails penetrate both the roof's surface and the rafter below. 3) Spacing between brackets shall not exceed 8 feet. **INSTALLING PLATFORM:** 1) Wood platforms shall not be less than 2 inches nominal thickness and shall extend beyond the platform arm not less than 6 inches and not more than 12 inches. 2) Always use clear, straight-grained wood free from knots or defects. 3) If extended length platforms are required, use additional roofing brackets every 8 feet. 4) Secure to bracket by nailing the platform to the bracket using the hole provided in the platform retainer. **INSTRUCTIONS FOR USE:** 1) No more than one person shall occupy any given 8 feet of a roofing bracket scaffold. 2) Always use an OSHA compliant fall arrest system, guardrail, catch platform or other safety equipment as required by Local, State or Federal OSHA Regulations. 3) Roof Brackets are intended for use by the experienced tradesman. 4) OSHA Regulations require that employers provide training in the use and care of this product. **CARE AND MAINTENANCE:** 1) Inspect all Roofing Brackets before each use to be sure that there is no damage or deformation, or deterioration from rusting. Discard if necessary. 2) Do not throw or drop from a building or onto a truck. 3) Do not use if exposed to extreme heat or cold. Discard at once. 4) Do not use if wet or frozen.